


# No. 74103/74104 - Battery Terminal Disconnect Switch

## INSTALLATION INSTRUCTIONS

**NOTE:** Disconnects Battery Power with one counter-clockwise turn of the knob.  
Do not attempt to pull the two halves of this assembly apart.

1. Remove negative cable from battery.
2. Clean battery negative post with suitable wire brush tool.
3. Install Battery Terminal Disconnect Switch onto negative post.
4. Install battery ground cable onto Battery Terminal Disconnect Switch.

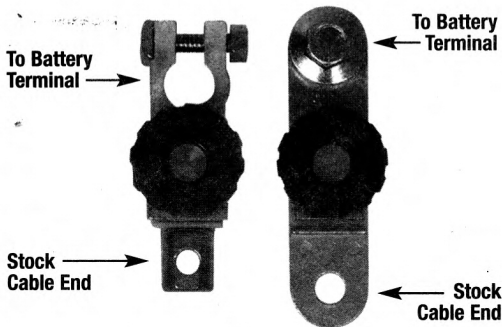

### MOROSO PERFORMANCE PRODUCTS, INC. LIMITED WARRANTY

If received within 90 days from the date of purchase and accompanied by a sales slip, Moroso Performance Products, Inc. will repair or provide a replacement for any part packaged on this board, which on careful inspection, is found to have defects in either materials or workmanship. This warranty does not cover damage to engine or other parts, labor, personal injury or other damage or injury.

This warranty is expressly in lieu of any other express or implied warranties, including any warranty of merchantability or fitness and of any other obligation on the part of Moroso Performance Products, Inc.

**For further technical information, call Moroso Technical Assistance at  
(203) 458-0542 8:15 a.m. - 5 p.m. ET**